



B

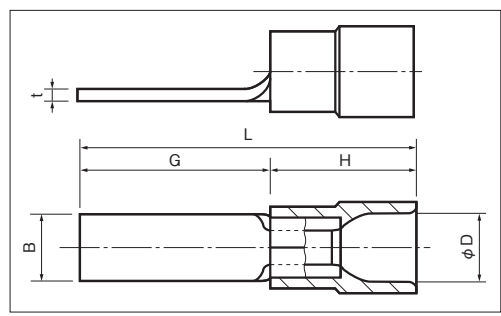

品番	各部の寸法 mm						電線抱合範囲		適用工具		標準色	包装個数
	B	t	L	G	H	φD	燃線mm ²	AWG	手動工具	適用工具		
TMEV BT-1.25-9-1 ○	2.2	0.75	19.0	9.0	10.0	4.1	0.3 ∩ 1.65	22-16	NH 11 NH 32	赤	1,000 (100×10)	
TMEV BT-1.25-9 ○	2.8		19.1	9.1								
TMEV BT-1.25-10-1 ○	2.2		20.5	10.5								
TMEV BT-1.25-10 ○	3.4		20.3	10.3								
TMEV BT-1.25-11 ○	3.0		21.2	11.2								
TMEV BT-1.25-13	3.4		23.0	13.0								
TMEV BT-1.25-14 ○	3.0		24.6	14.6								
TMEV BT-1.25-18 ○	2.2		28.5	18.5								
TMEV BT-2-9-1 ○	2.2	0.85	19.0	9.0	10.0	4.5	1.04 ∩ 2.63	16-14	NH 12 NH 32	青	1,000 (100×10)	
TMEV BT-2-9 ○	2.8		19.1	9.1								
TMEV BT-2-13 ○	4.6		23.0	13.0								
TMEV BT-2-18 ○	2.2		28.5	18.5								
TMEV BT-5.5-10 ○	2.8	0.95	24.0	10.0	14.0	6.8	2.63 ∩ 6.64	12-10	NH 13	黄	100	
TMEV BT-5.5-13 ○	4.5		27.0	13.0								
TMEV BT-5.5-18 ○	4.5		32.0	18.0								

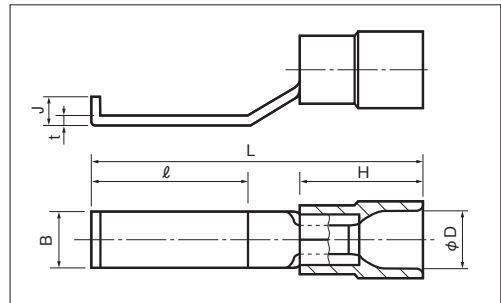

品番	各部の寸法 mm							電線抱合範囲		適用工具		標準色	包装個数 (ヶ×箱)
	B	t	ℓ	L	J	H	φD	燃線mm ²	AWG	手動工具	適用工具		
TMEV BT-1.25-17 ○	3.0	0.75	12.7	27.0	2.25	10.0	4.1	0.3 ∩ 1.65	22-16	NH 11 NH 32	赤	1,000 (100×10)	
TMEV BT-1.25-17-1 ○	4.6												
TMEV BT-2-17 ○	3.0	0.85		2.30	4.5	1.04 ∩ 2.63	16-14	NH 12 NH 32	青	1,000 (100×10)			
TMEV BT-2-17-1 ○	4.6												
TMEV BT-5.5-17-1 ○	4.6	0.95	31.0	2.45	14.0	6.8	2.63 ∩ 6.64	12-10	NH 13	黄	100		

注1) ○ : UL・CSA登録品
 2) UL・CSA登録品 絶縁体の材質・色 電線被覆ムキ寸法 についてはP33をご覧ください。
 3) TMEV (ポリ塩化ビニル) 端子は標準色以外に透明色がございます。